

Fast and Easy. Do it the...

KWIK-WAY®

545 *Extreme XL*


SIZE DOES MATTER

New
Tecnoroller III-SL
with
DOUBLE PISTON
Power

**Handles 26" Wheels
Without Adapters**

**Telescopic
Tilt-Tower
Tire Changer**

- *Mounts/demounts up to 26" wheels* with standard equipment - no additional adapters required
- *NEW Tecnoroller III-SL with Twin Pistons* - out powers the competition
- *NEW Tecnoroller III-SL with Twin Rollers* - smooth, easy mounting and demounting
- Extreme because *Follower Arm* takes you to the next level with ease of operation
- *Telescopic tower* makes this the strongest and most versatile machine on the market
- *Minimize Possibility of Wheel Damage* - virtually nothing touches the wheel

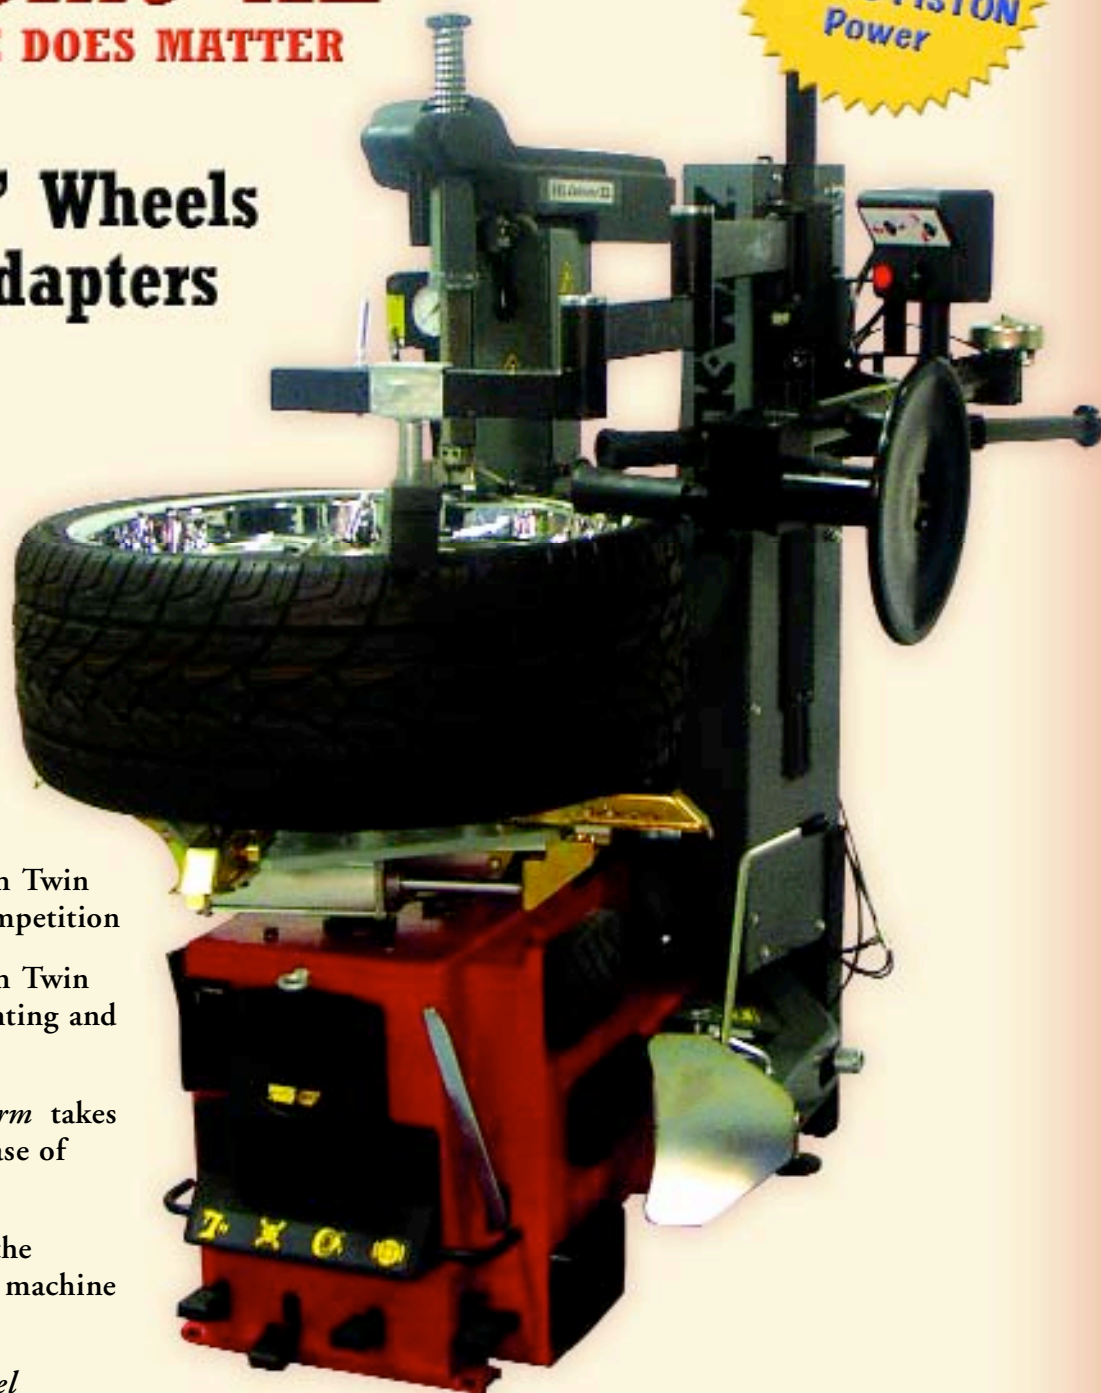

545 Extreme XL Tire Changer



Ordering Information:

545 Extreme XL Telescopic, Tilt-Tower Tire Changer

Standard Equipment includes: *Tire Iron, Five Tower Tabs (for alloy wheel protection), Tire Lube Cup & Brush, ZEPPA (low profile Adapter), Bead Blast System, Patented Safety Strap System and Tecnoroller III-SL with Follower Arm.*

545 Extreme XL Telescoping Tilt-Tower Tire Changer
with Tecnoroller III-SL & Follower Arm 545-0001-45

Specifications

Tire Diameter	40"
Maximum Wheel & Tire Width	14"
Maximum Wheel Width (with tower extended)	20"
Wheel Clamp – External	10" - 26"
Wheel Clamp – Internal	12" - 26"
Bead Breaker Force	5,500 Lbs
Electrical Requirement	115 Volt (60 hz/1Ph)
Net Weight	865 Lbs
Shipping Weight	965 Lbs



Zeppa, Low-Profile Mounting Adapter (Standard)

- Fast, worry-free mounting
- Fits all style wheels
- Safe and easy-to-use




Safety Strap System (Standard)

- Unique safety device prevents the ejection of a tire in case of an explosion
- Ensures maximum safety during tire inflation



Bead Blast System (Standard)

- Less effort seating the bead
- Eliminates back strain - seats bead on the most difficult tires and wheels

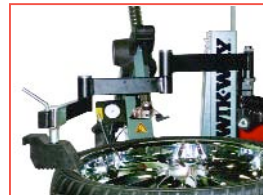

NEW Follower Arm (Standard)

- Hand-free mounting of the most difficult tires



NEW Tecnoroller III-SL (Standard)

- NEW Double Piston Power - exclusive to the Tecnoroller III-SL
- Roller design allows the upper bead to be pressed into the drop center during mounting *and* provides easy removal of the lower bead when demounting
- Speeds the process to effortlessly mount & demount without scratching the wheel



NEW 241 Tire Lift (Optional)

- Assists in loading wheels on tire changers or wheel balancers
- Minimizes back strain
- Easy to operate



Nylon Tower Head Cover (Optional)

- Minimize damage to wheels

Standard Accessories

Tire Iron	502-1026-83
Tower Tabs (<i>alloy wheel protectors</i>) - 5 provided	502-1007-98
Tire Lube Reservoir and Brush	502-0013-52
Zeppa Low-Profile Assist	502-1020-95
Patented Tecnoroller III-SL	508-5000-03
Follower Arm	508-5000-02

Optional Parts & Accessories

241 Two-For-One Tire Lift	241-0000-01
Kwik-Change, Hi-Performance Nylon Mount/Demount Head Adapter Kit	502-7000-00
Replacement Nylon Mount/Demount Head (<i>requires use of Kit 502-7000-00</i>)	502-7000-10
Bead Breaker Protective Cover (<i>alloy wheels</i>)	502-1018-00
Nylon Tower Hear Cover	502-1027-25

Call for a Distributor near you

1-800-553-5953

KW Products • 500 57th Street • Marion, IA 52302 USA
319-377-9421 • (FAX) 319-377-9101 • www.kwik-way.com